

SANCOM

SA-PAN027037-P52

2.7-3.7 GHz High Power GaN-HEMT

Features

Frequency Range: 2.7-3.7 GHz

 $P_{\text{sat}} \geq 52 \text{ dBm}$ Power Gain: $\geq 12 \text{ dB}$ Efficiency: $\geq 50\%$ $Z_{\text{in}}/Z_{\text{out}} = 50 \Omega$ 

Description

Sancom Electric's GaN-HEMT SA-PAN027037-P52 offers high power, high efficiency, ease of matching and greater consistency for high power applications with 32V operation. The SA-PAN027037-P52 typically provides 52 dBm of saturated output power and 12 dB of large-signal gain and can be widely used in various RF/microwave systems.

ABSOLUTE MAXIMUM RATINGS


| Parameter | Symbol | Condition | Rating | Unit |
|----------------------|-----------|-----------|------------|------|
| Drain-Source Voltage | V_{DS} | TC=25°C | 40 | V |
| Gate-Source Voltage | V_{GS} | TC=25°C | -5 | V |
| Storage Temperature | T_{stg} | TC=25°C | -65 to 150 | °C |
| Channel Temperature | T_{ch} | TC=25°C | 150 | °C |

ELECTRICAL SPECIFICATIONS


| Parameter | Symbol | Condition | Min | Typ | Max | Unit |
|----------------------|------------|---|------|-----|-----|------|
| Drain-Source Current | I_{DS} | V_{DS} : 32 V Pulse T=1ms, Duty=10% P_{in} : 40 dBm Freq: 2.7 ~ 3.7 GHz | - | 9.9 | - | A |
| Saturated Power | P_{sat} | | 52 | - | - | dBm |
| Power Gain | G_p | | 12 | - | - | dB |
| Efficiency | η | | 50 | - | - | % |
| Flatness | ΔG | | -0.8 | - | 0.8 | dB |

Performance Plots


Saturated Power VS Frequency

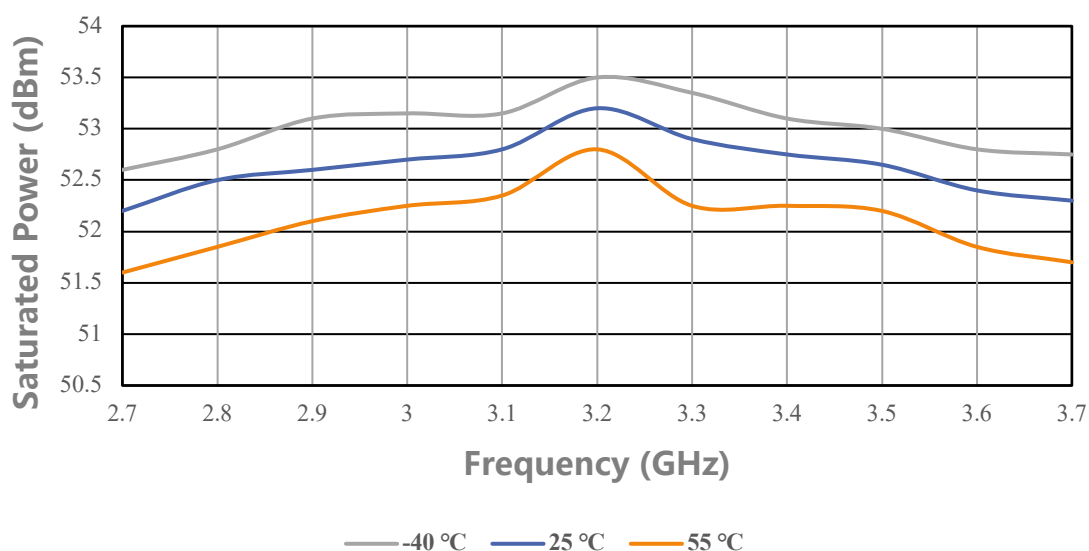


Efficiency VS Frequency

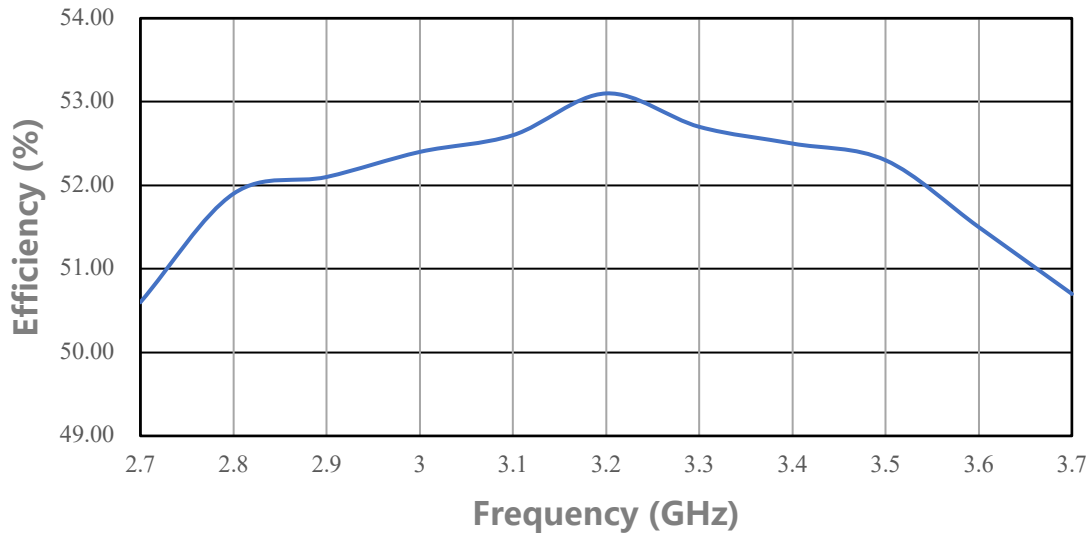

Power Gain VS Frequency

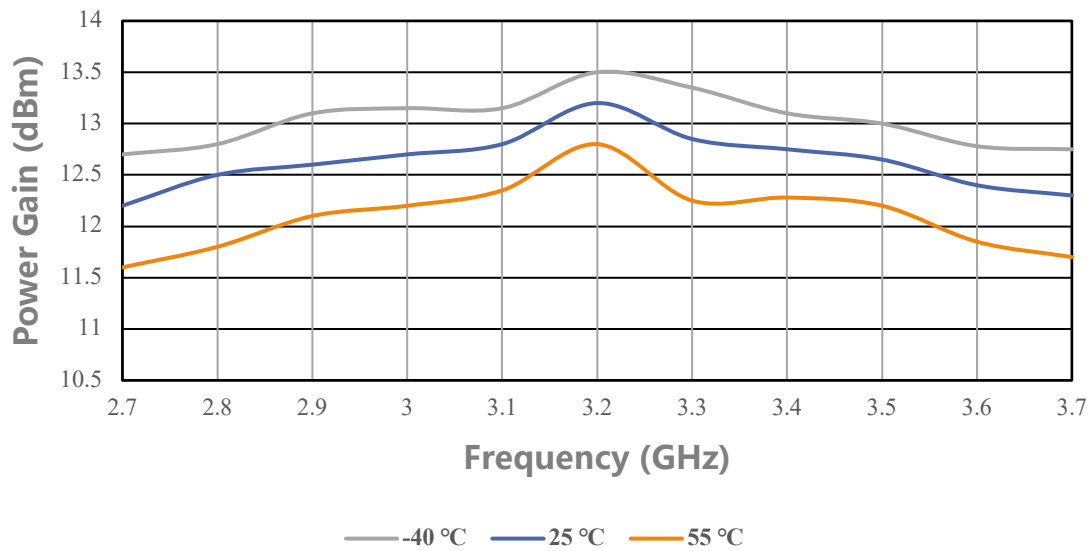

Simplified Block Diagram

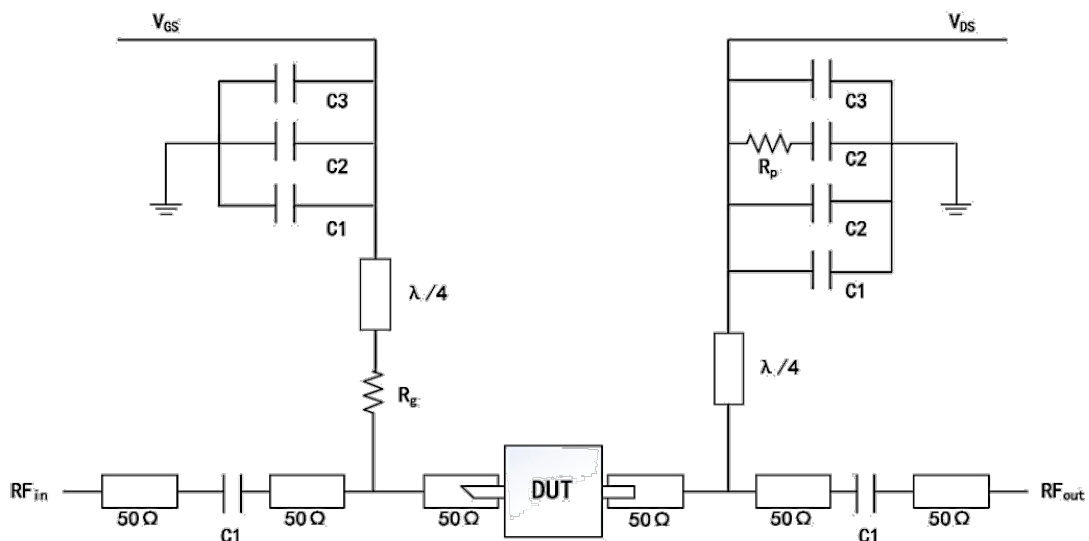

| DUT information | |
|-----------------|-----------------------|
| C1: 8 pF | R _p : 51 Ω |
| C2: 1000 pF | R _g : 15 Ω |
| C3: 100 μF | |

ESD Protection

| | | |
|-----|-----------|--------|
| ESD | Class III | 2000 V |
|-----|-----------|--------|

Outline Drawing



Unit: mm

Attention

- Please keep away from moisture during transportation and storage
- Pay attention to ESD prevention during chip use and assembly. Wear a grounding ESD bracelet.
- When adding electricity, add gate electricity first and then add leakage electricity