

# SANCOM

**SA-PA016017-P37-1****1.6-1.7 GHz High Power GaAs-HEMT**

## Features


Frequency Range: 1.6-1.7 GHz

$P_{1dB} : \geq 37 \text{ dBm}$

Power Gain:  $\geq 13 \text{ dB}$

Efficiency: = 40% (Type)

$Z_{in} / Z_{out} = 50 \Omega$

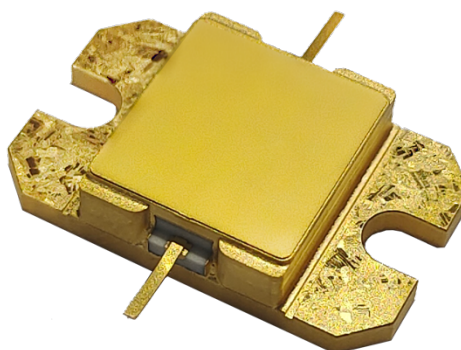

## Description

Sancom Electric's GaAs-HEMT SA-PA016017-P37-1 offers high power, high efficiency, ease of matching and greater consistency for high power applications with 10V operation. The SA-PA016017-P37-1 typically provides 37 dBm of 1dB output power and 13 dB of large-signal gain and can be widely used in various RF/microwave systems.

### ABSOLUTE MAXIMUM RATINGS


Parameter	Symbol	Condition	Rating	Unit
Drain-Source Voltage	$V_{DS}$	TC=25°C	11	V
Gate-Source Voltage	$V_{GS}$	TC=25°C	-5	V
Storage Temperature	$T_{stg}$	TC=25°C	-65 to 150	°C
Channel Temperature	$T_{ch}$	TC=25°C	150	°C

### ELECTRICAL SPECIFICATIONS


Parameter	Symbol	Condition	Min	Typ	Max	Unit
Drain-Source Current	$I_{DS}$	$V_{DS}$ : 10 V CW (Continuous Wave) $P_{in}$ : 24 dBm Freq: 1.6 ~ 1.7 GHz	-	1.3	-	A
1dB Output	$P_{1dB}$		37	-	-	dBm
Power Gain	$G_p$		13	-	-	dB
Efficiency	$\eta$		-	40	-	%
Flatness	$\Delta G$		-0.8	-	0.8	dB

## Performance Plots


$P_{1dB}$  VS Frequency

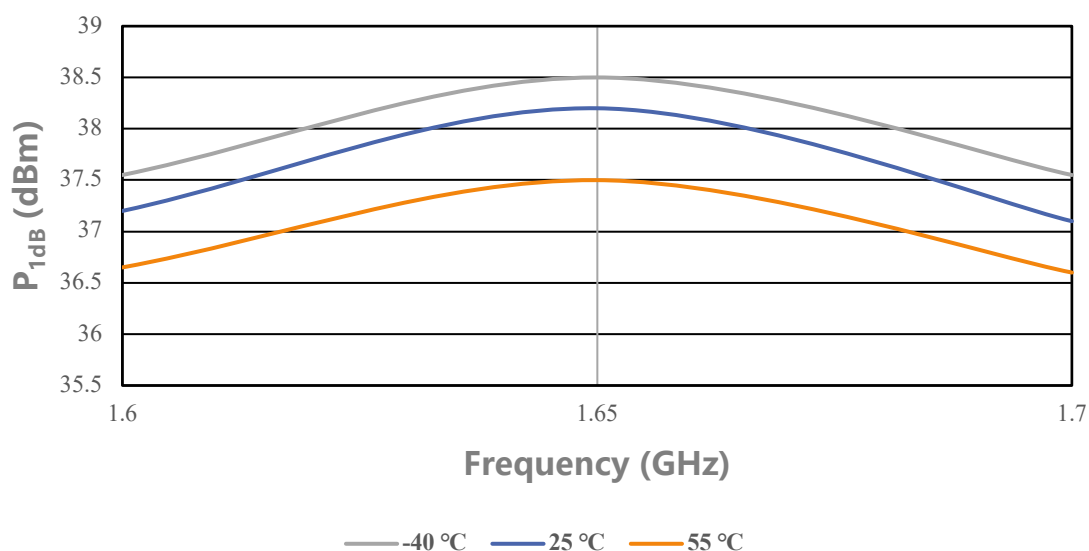


### Efficiency VS Frequency

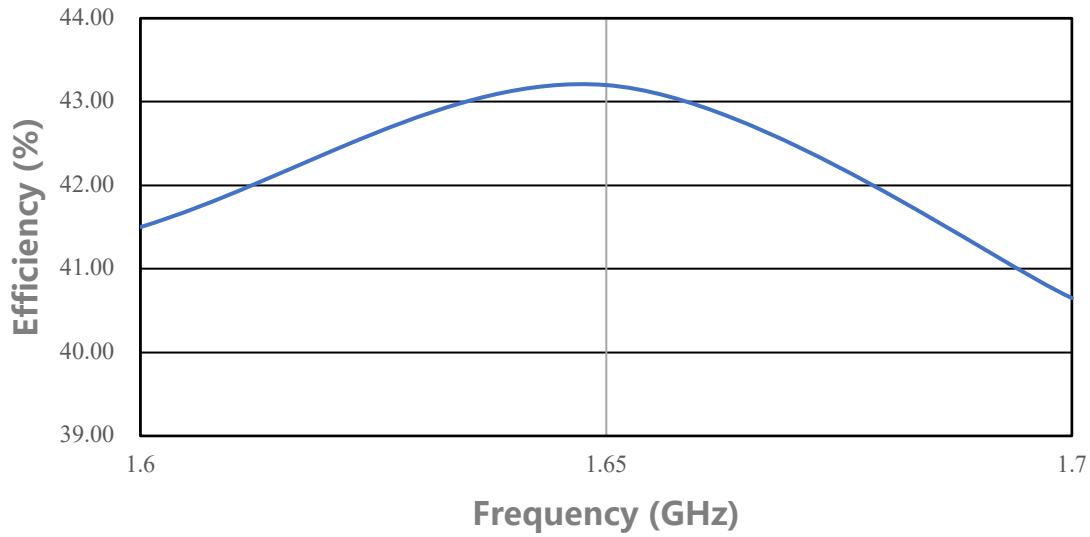

### Power Gain VS Frequency

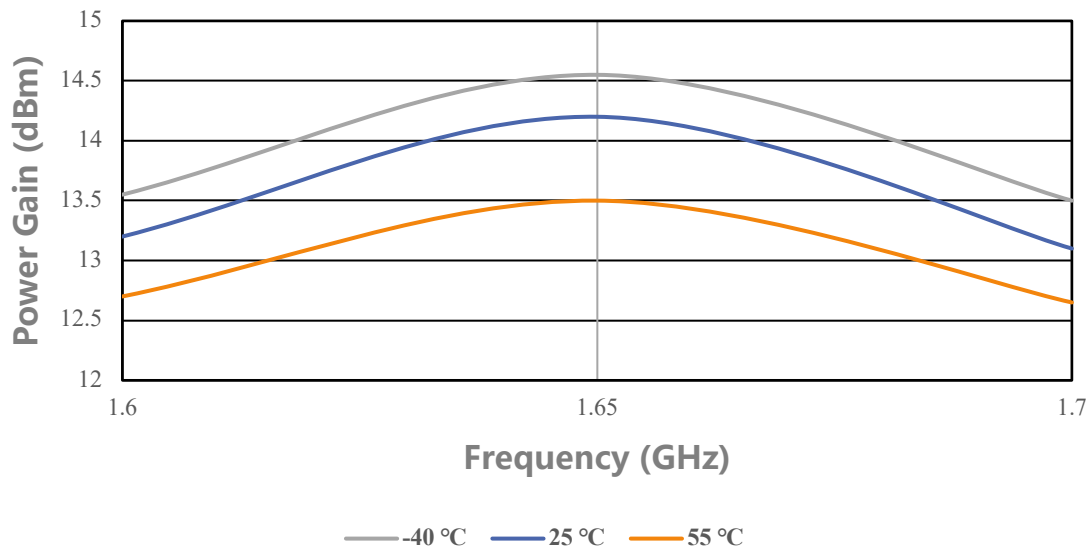

## Simplified Block Diagram

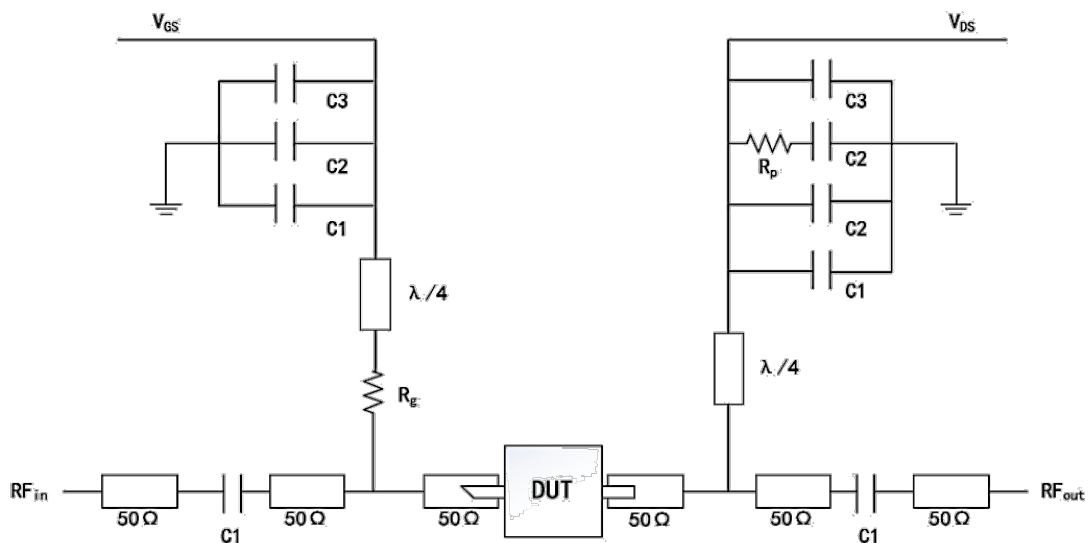


DUT information	
C1: 20 pF	Rp: 51 Ω
C2: 1000 pF	Rg: 15 Ω
C3: 100 μF	

## ESD Protection

ESD	Class III	2000 V
-----	-----------	--------

## Outline Drawing

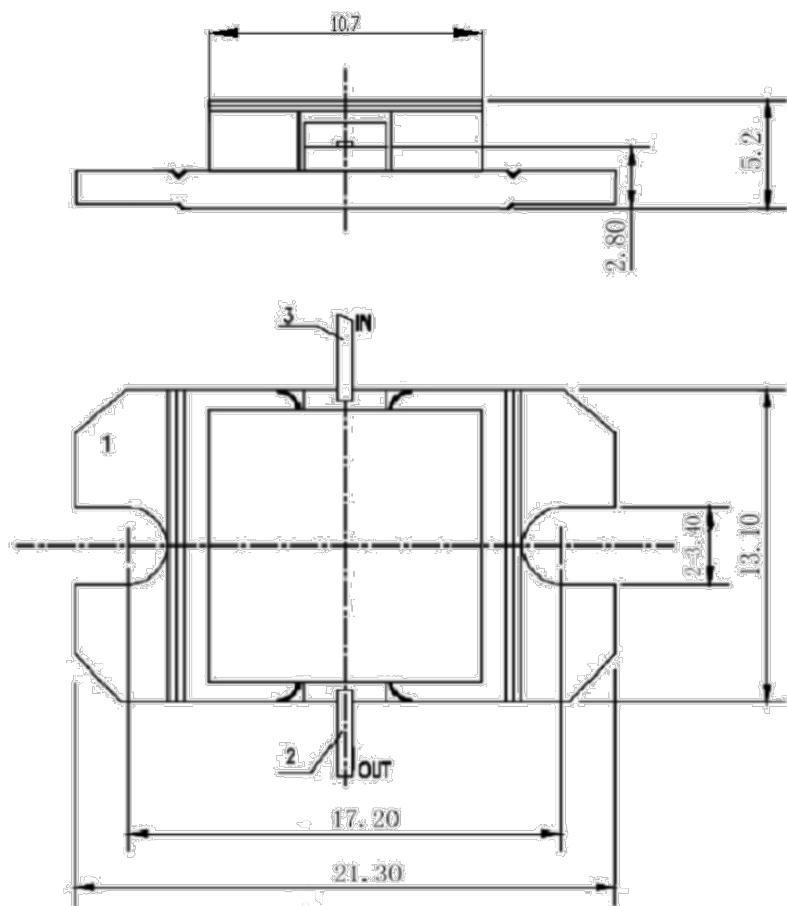

Unit: mm

## Attention

- Please keep away from moisture during transportation and storage
- Pay attention to ESD prevention during chip use and assembly. Wear a grounding ESD bracelet.
- When adding electricity, add gate electricity first and then add leakage electricity