

SANCOM

SA-PA016017-P40-1**1.6-1.7 GHz High Power GaAs-HEMT**

Features


Frequency Range: 1.6-1.7 GHz

P_{1dB} : ≥ 40 dBm

Power Gain: ≥ 13 dB

Efficiency: $\geq 40\%$

$Z_{in}/Z_{out} = 50 \Omega$

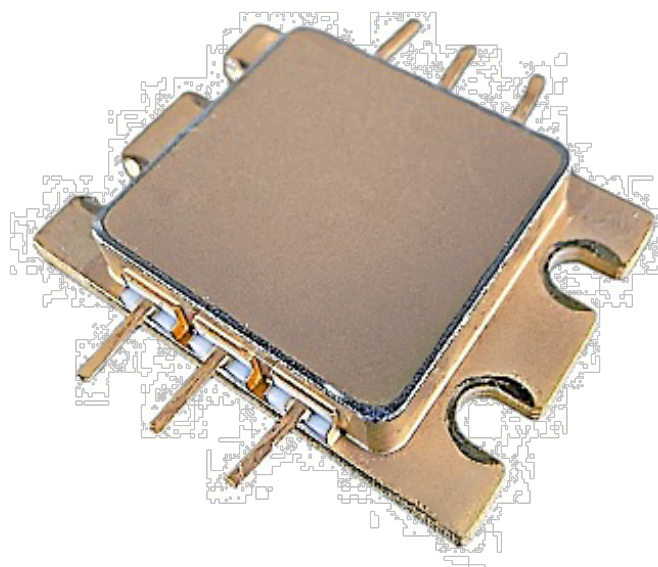

Description

Sancom Electric's GaAs-HEMT SA-PA016017-P40-1 offers high power, high efficiency, ease of matching and greater consistency for high power applications with 10 V operation. The SA-A016017-P40-1 typically provides 40 dBm of 1dB output power and 13 dB of large-signal gain and can be widely used in various RF/microwave systems.

ABSOLUTE MAXIMUM RATINGS


Parameter	Symbol	Condition	Rating	Unit
Drain-Source Voltage	V_{DS}	$TC=25^{\circ}C$	11	V
Gate-Source Voltage	V_{GS}	$TC=25^{\circ}C$	-5	V
Storage Temperature	T_{stg}	$TC=25^{\circ}C$	-65 to 150	$^{\circ}C$
Channel Temperature	T_{ch}	$TC=25^{\circ}C$	150	$^{\circ}C$

ELECTRICAL SPECIFICATIONS


Parameter	Symbol	Condition	Min	Typ	Max	Unit
Drain-Source Current	I_{DS}	$V_{DS}: 10\text{ V}$ CW (Continuous Wave) $P_{in}: 27\text{ dBm}$ Freq: 1.6 ~ 1.7 GHz	-	2.5	-	A
1dB Output	P_{1dB}		40	-	-	dBm
Power Gain	G_p		13	-	-	dB
Efficiency	η		40	-	-	%
Flatness	ΔG		-0.8	-	0.8	dB

Performance Plots


P_{1dB} VS Frequency

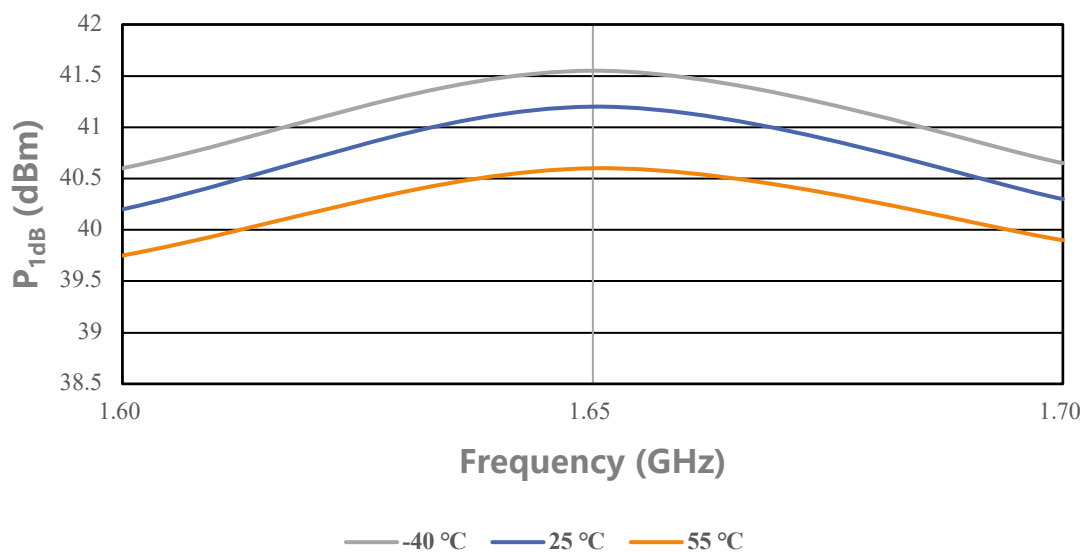


Efficiency VS Frequency

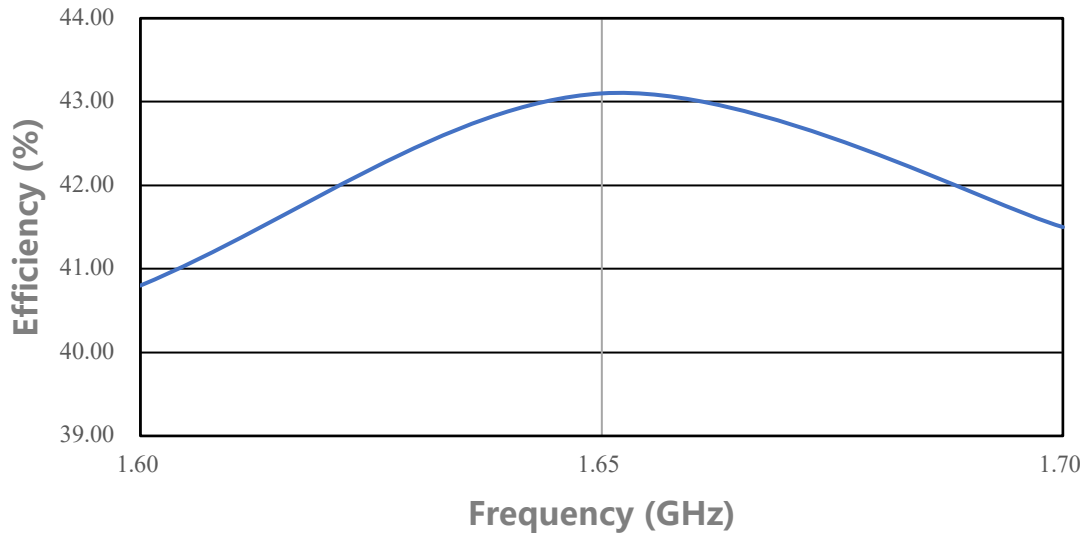

Power Gain VS Frequency

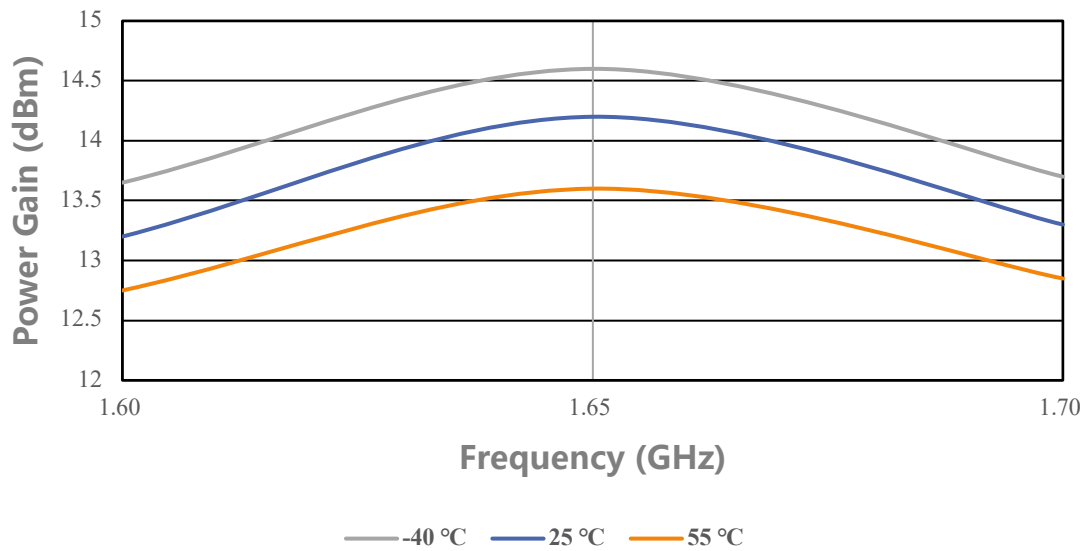


Simplified Block Diagram

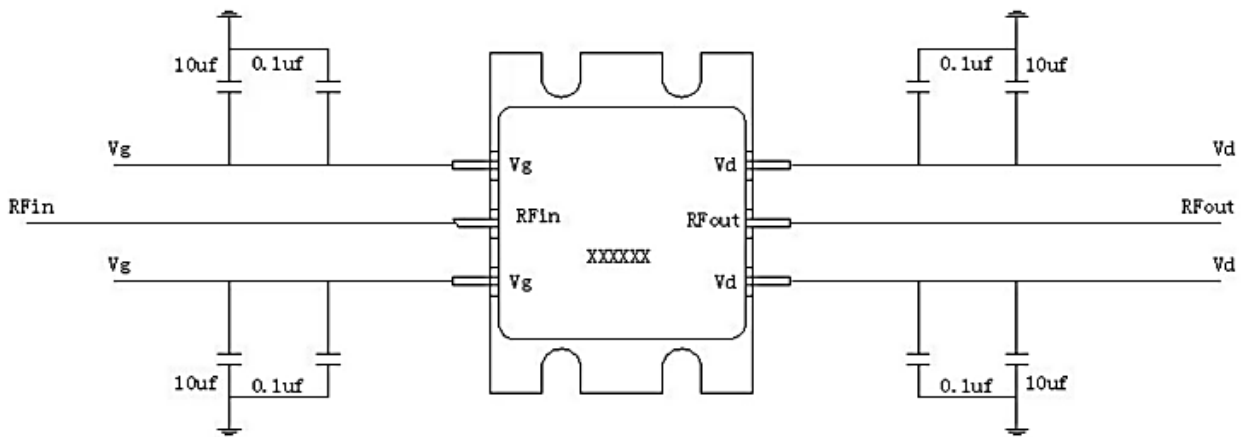

ESD Protection

ESD	Class III	2000 V
-----	-----------	--------

Outline Drawing

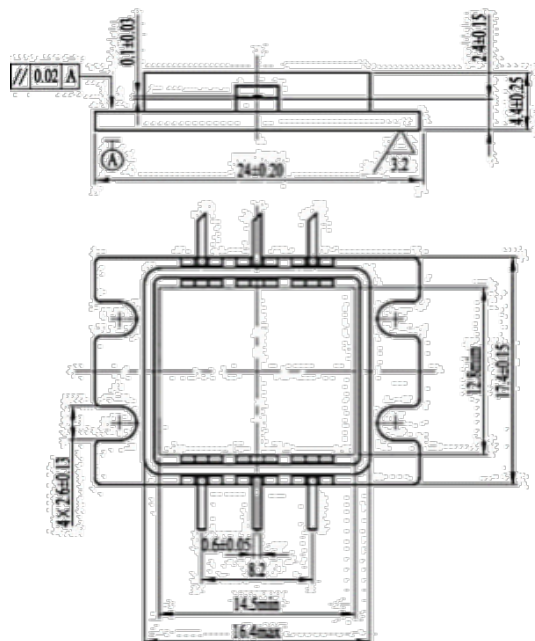

Unit: mm

Attention

- Please keep away from moisture during transportation and storage
- Pay attention to ESD prevention during chip use and assembly. Wear a grounding ESD bracelet.
- When adding electricity, add gate electricity first and then add leakage electricity