

SANCOM

SA-PA034039-P42**3.4-3.9 GHz High Power GaAs-HEMT**

Features

Frequency Range: 3.4 – 3.9 GHz

$P_{\text{sat}} : \geq 42 \text{ dBm}$

Power Gain: $\geq 8.5 \text{ dB}$

Efficiency: = 35% (Type)

$Z_{\text{in}} / Z_{\text{out}} = 50 \Omega$



Description

Sancom Electric's GaAs-HEMT SA-PA034039-P42 offers high power, high efficiency, ease of matching and greater consistency for high power applications with 10V operation. The SA-PA034039-P42 typically provides 42 dBm of saturated output power and 8.5 dB of large-signal gain and can be widely used in various RF/microwave systems.

ABSOLUTE MAXIMUM RATINGS


Parameter	Symbol	Condition	Rating	Unit
Drain-Source Voltage	V_{DS}	TC=25°C	11	V
Gate-Source Voltage	V_{GS}	TC=25°C	-5	V
Storage Temperature	T_{stg}	TC=25°C	-65 to 150	°C
Channel Temperature	T_{ch}	TC=25°C	150	°C

ELECTRICAL SPECIFICATIONS


Parameter	Symbol	Condition	Min	Typ	Max	Unit
Drain-Source Current	I_{DS}	V_{DS} : 10 V CW (Continuous Wave) P_{in} : 33.5 dBm Freq: 3.4 ~ 3.9 GHz	-	4.5	-	A
Saturated Power	P_{sat}		42	-	-	dBm
Power Gain	G_p		8.5	-	-	dB
Efficiency	η		-	35	-	%
Flatness	ΔG		-0.8	-	0.8	dB

Performance Plots


Saturated Power VS Frequency

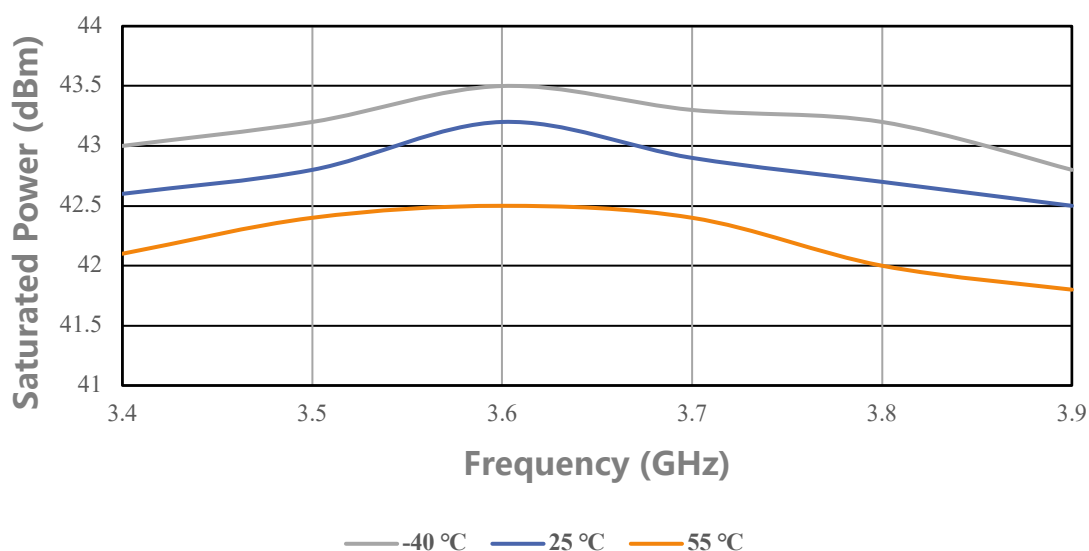


Efficiency VS Frequency

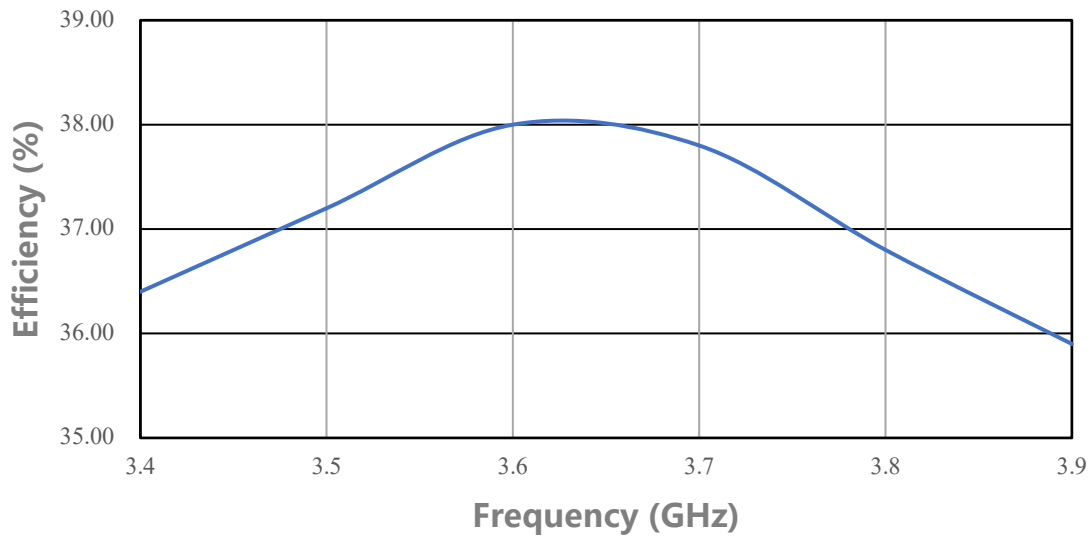

Power Gain VS Frequency

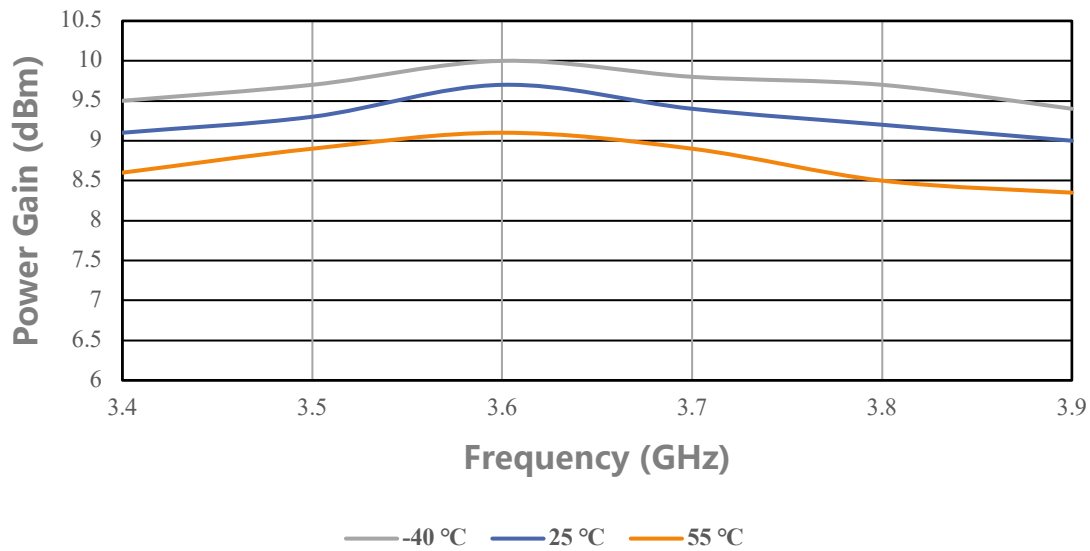

Simplified Block Diagram

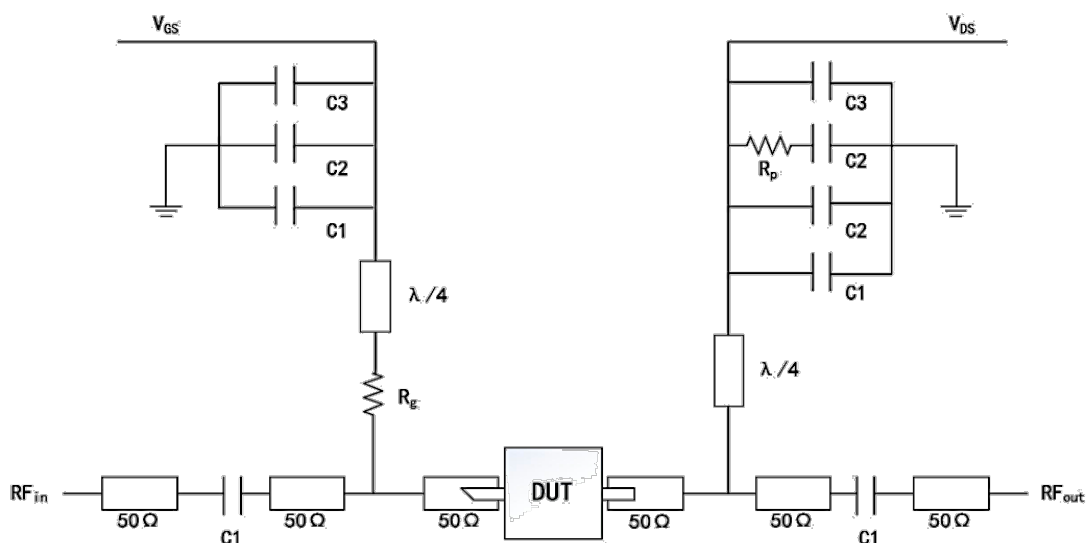

DUT information	
C1: 8 pF	Rp: 51 Ω
C2: 1000 pF	Rg: 15 Ω
C3: 100 μF	

ESD Protection

ESD	Class III	2000 V
-----	-----------	--------

Outline Drawing



Unit: mm

Attention

- Please keep away from moisture during transportation and storage
- Pay attention to ESD prevention during chip use and assembly. Wear a grounding ESD bracelet.
- When adding electricity, add gate electricity first and then add leakage electricity