

# SANCOM

**SA-PA090100-P39-1****9.0-10.0 GHz High Power GaAs-HEMT**

## Features

Frequency Range: 9.0-10.0 GHz

$P_{1dB} : \geq 39 \text{ dBm}$

Power Gain:  $\geq 7 \text{ dB}$

Efficiency:  $\geq 30\%$

$Z_{in} / Z_{out} = 50 \Omega$



## Description

Sancom Electric's GaAs-HEMT SA-PA090100-P39-1 offers high power, high efficiency, ease of matching and greater consistency for high power applications with 10V operation. The SA-PA090100-P39-1 typically provides 39 dBm of 1dB output power and 7 dB of large-signal gain and can be widely used in various RF/microwave systems.

### ABSOLUTE MAXIMUM RATINGS


| Parameter            | Symbol    | Condition | Rating     | Unit |
|----------------------|-----------|-----------|------------|------|
| Drain-Source Voltage | $V_{DS}$  | TC=25°C   | 11         | V    |
| Gate-Source Voltage  | $V_{GS}$  | TC=25°C   | -5         | V    |
| Storage Temperature  | $T_{stg}$ | TC=25°C   | -65 to 150 | °C   |
| Channel Temperature  | $T_{ch}$  | TC=25°C   | 150        | °C   |

### ELECTRICAL SPECIFICATIONS


| Parameter            | Symbol     | Condition                                                                            | Min  | Typ | Max | Unit |
|----------------------|------------|--------------------------------------------------------------------------------------|------|-----|-----|------|
| Drain-Source Current | $I_{DS}$   | $V_{DS}$ : 10 V<br>CW (Continuous Wave)<br>$P_{in}$ : 32 dBm<br>Freq: 9.0 ~ 10.0 GHz | -    | 2.6 | -   | A    |
| 1dB Output           | $P_{1dB}$  |                                                                                      | 39   | -   | -   | dBm  |
| Power Gain           | $G_p$      |                                                                                      | 7    | -   | -   | dB   |
| Efficiency           | $\eta$     |                                                                                      | 30   | -   | -   | %    |
| Flatness             | $\Delta G$ |                                                                                      | -0.8 | -   | 0.8 | dB   |

## Performance Plots


$P_{1dB}$  VS Frequency

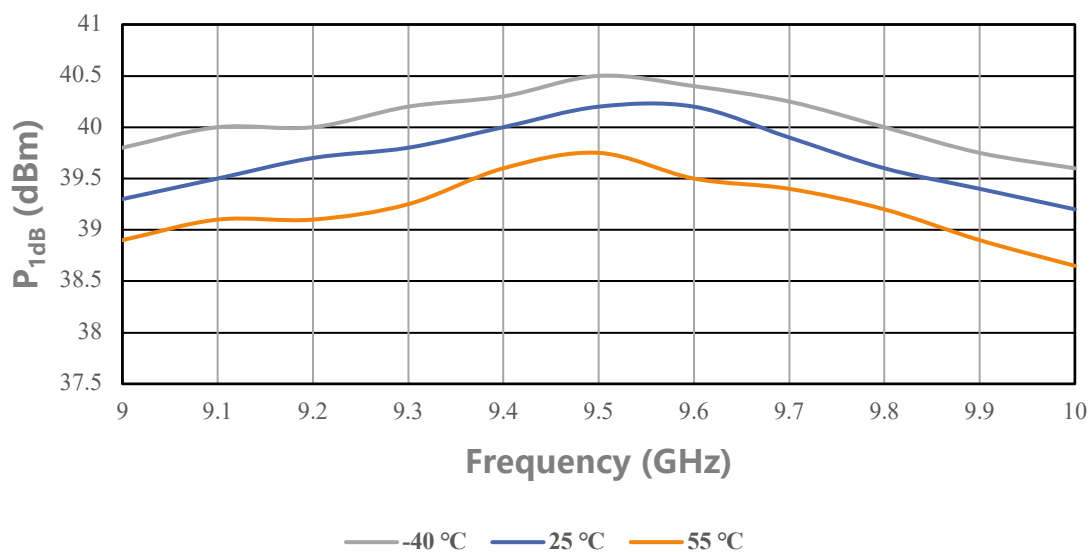

### Efficiency VS Frequency

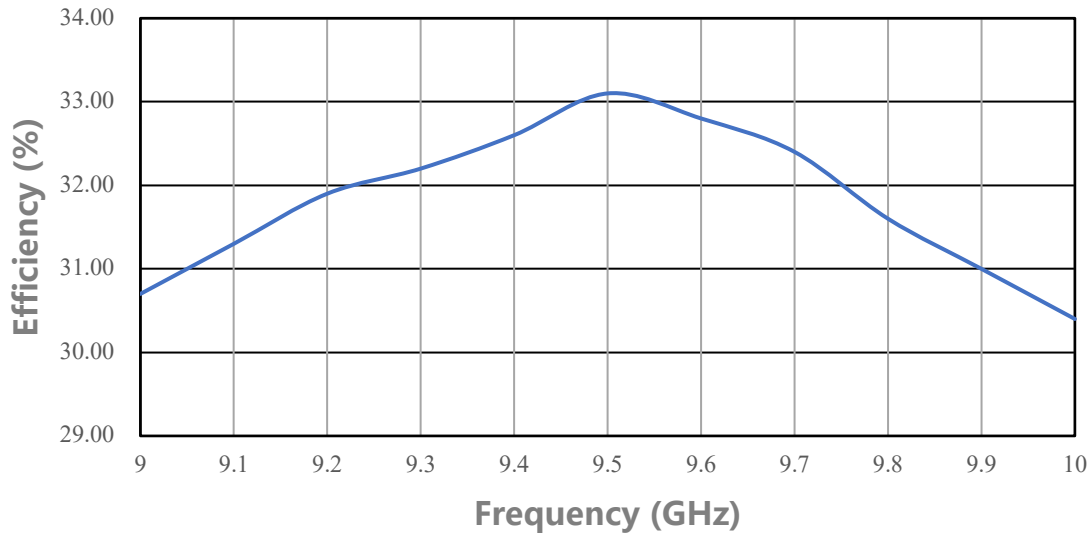

### Power Gain VS Frequency

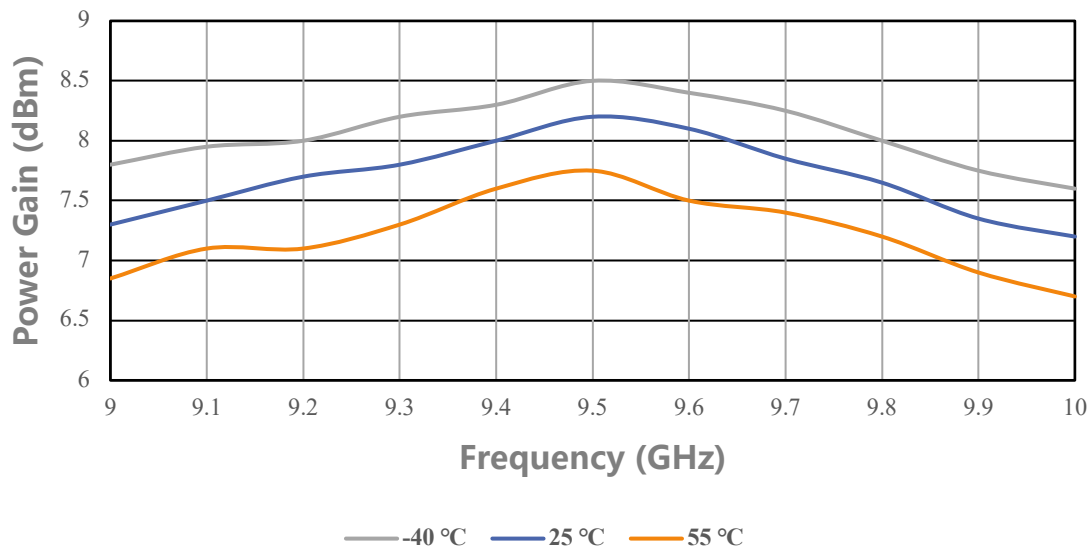

## Simplified Block Diagram



### DUT information

|                 |                     |
|-----------------|---------------------|
| C1: 1 pF        | $R_p$ : 51 $\Omega$ |
| C2: 1000 pF     | $R_g$ : 15 $\Omega$ |
| C3: 100 $\mu$ F | $R \approx 3.5$ mm  |

## ESD Protection

|     |           |        |
|-----|-----------|--------|
| ESD | Class III | 2000 V |
|-----|-----------|--------|

## Outline Drawing



Unit: mm

## Attention

- Please keep away from moisture during transportation and storage
- Pay attention to ESD prevention during chip use and assembly. Wear a grounding ESD bracelet.
- When adding electricity, add gate electricity first and then add leakage electricity