

SANCOM

SA-PAN009012-P56**0.9-1.2 GHz High Power GaN-HEMT**

Features


Frequency Range: 0.9-1.2 GHz

$P_{\text{sat}} \geq 56\text{dBm}$

Power Gain: $\geq 14\text{dB}$

Efficiency: = 50% (Type)

$Z_{\text{in}}/ Z_{\text{out}} = 50 \Omega$

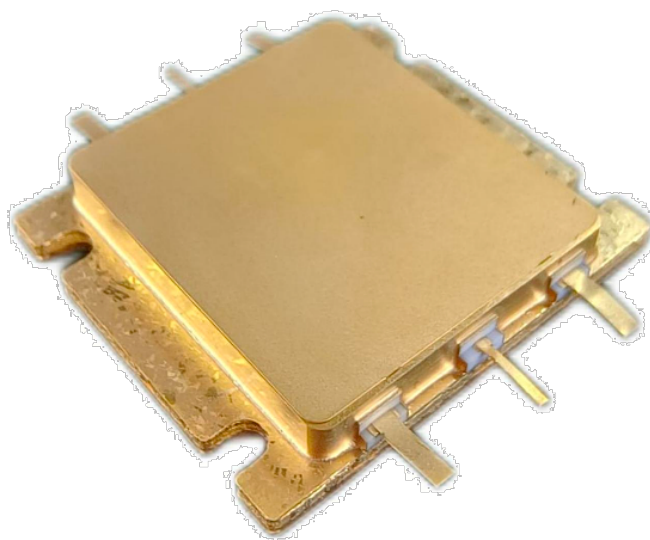

Description

Sancom Electric's GaN-HEMT SA-PAN009012-P56 offers high power, high efficiency, ease of matching and greater consistency for high power applications with 50V operation. The SA-PAN009012-P56 typically provides 56 dBm of saturated output power and 14 dB of large-signal gain.

ABSOLUTE MAXIMUM RATINGS


Parameter	Symbol	Condition	Rating	Unit
Drain-Source Voltage	V_{DS}	$TC=25^{\circ}C$	60	V
Gate-Source Voltage	V_{GS}	$TC=25^{\circ}C$	-5	V
Storage Temperature	T_{stg}	$TC=25^{\circ}C$	-65 to 150	$^{\circ}C$
Channel Temperature	T_{ch}	$TC=25^{\circ}C$	150	$^{\circ}C$

ELECTRICAL SPECIFICATIONS


Parameter	Symbol	Condition	Min	Typ	Max	Unit
Drain-Source Current	I_{DS}	$V_{DS}: 50\text{ V}$ Pulse $T= 1\text{ms}, \text{Duty}= 20\%$ $P_{in}: 26\text{dBm}$ Freq: 0.9 ~ 1.2 GHz	-	0.6	-	A
Saturated Power	P_{sat}		56	-	-	dBm
Power Gain	G_p		14	-	-	dB
Efficiency	η		-	50	-	%
Flatness	ΔG		-0.8	-	0.8	dB

Performance Plots


Saturated Power VS Frequency

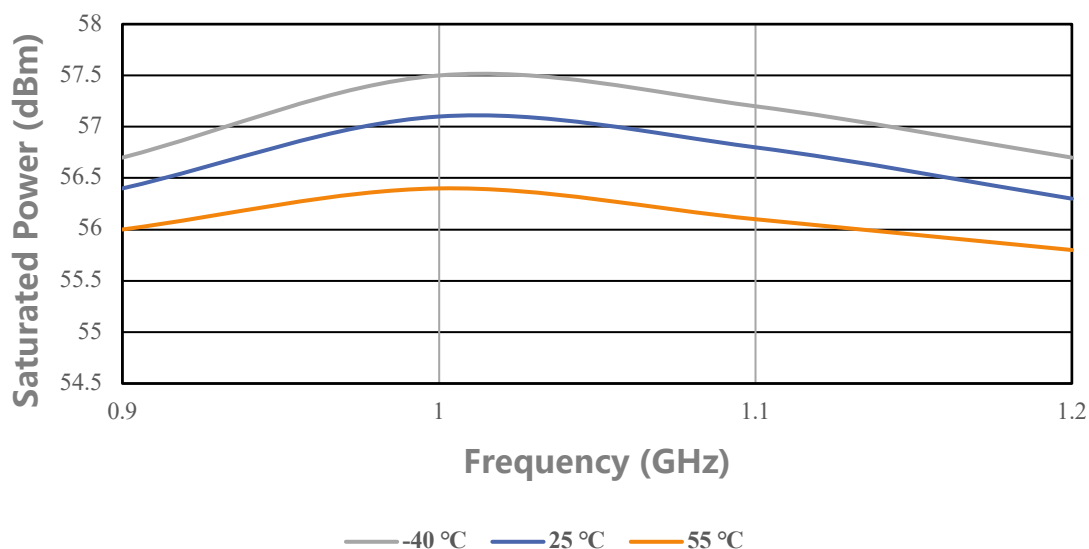


Efficiency VS Frequency

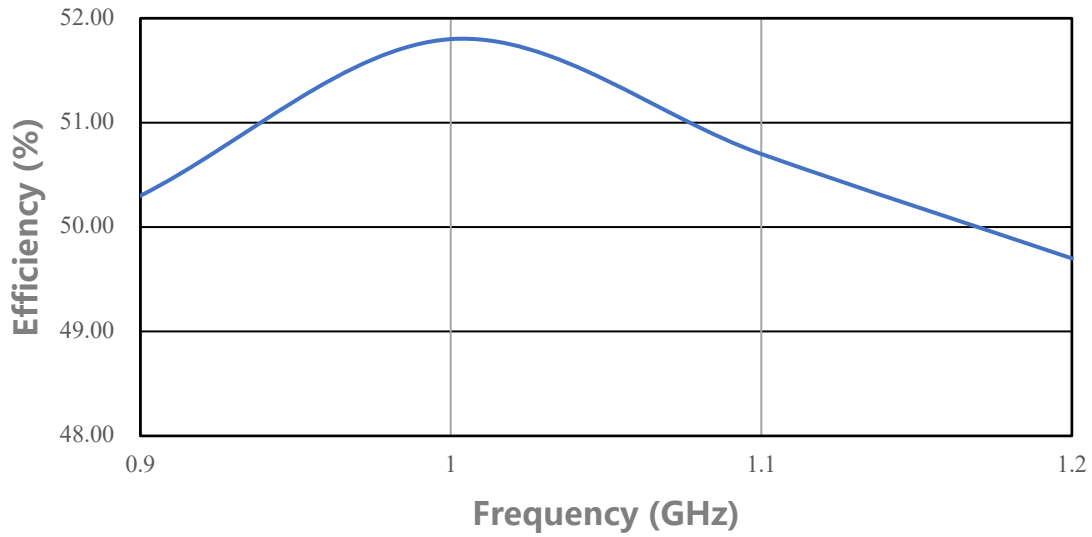

Power Gain VS Frequency

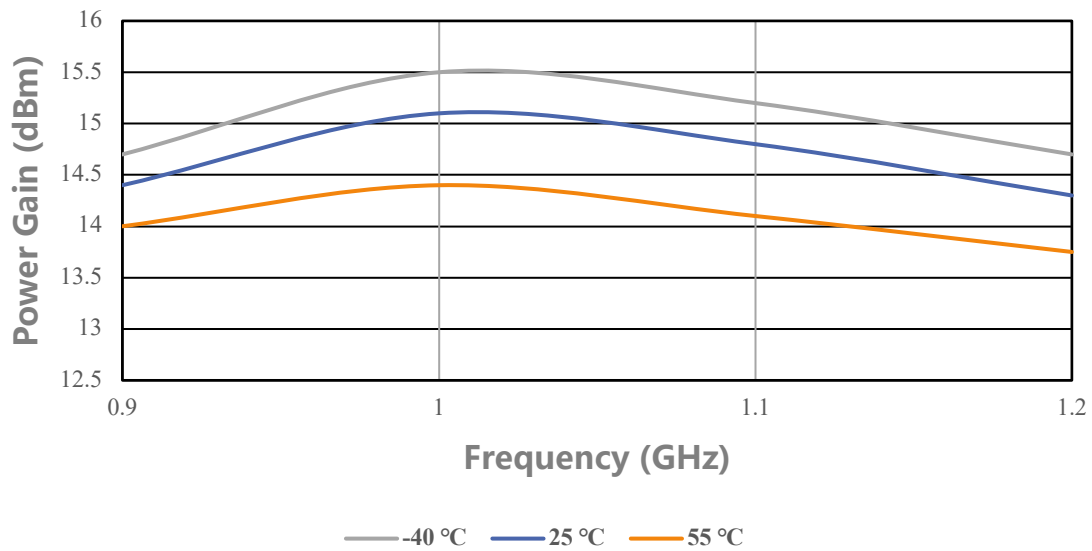


Simplified Block Diagram

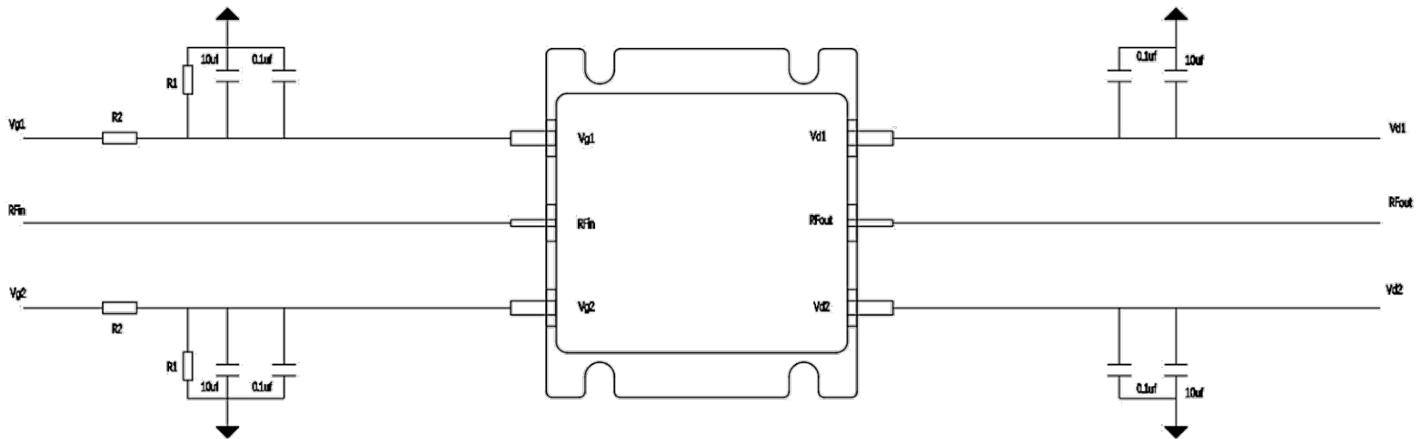

ESD Protection

ESD	Class III	2000 V
-----	-----------	--------

Outline Drawing

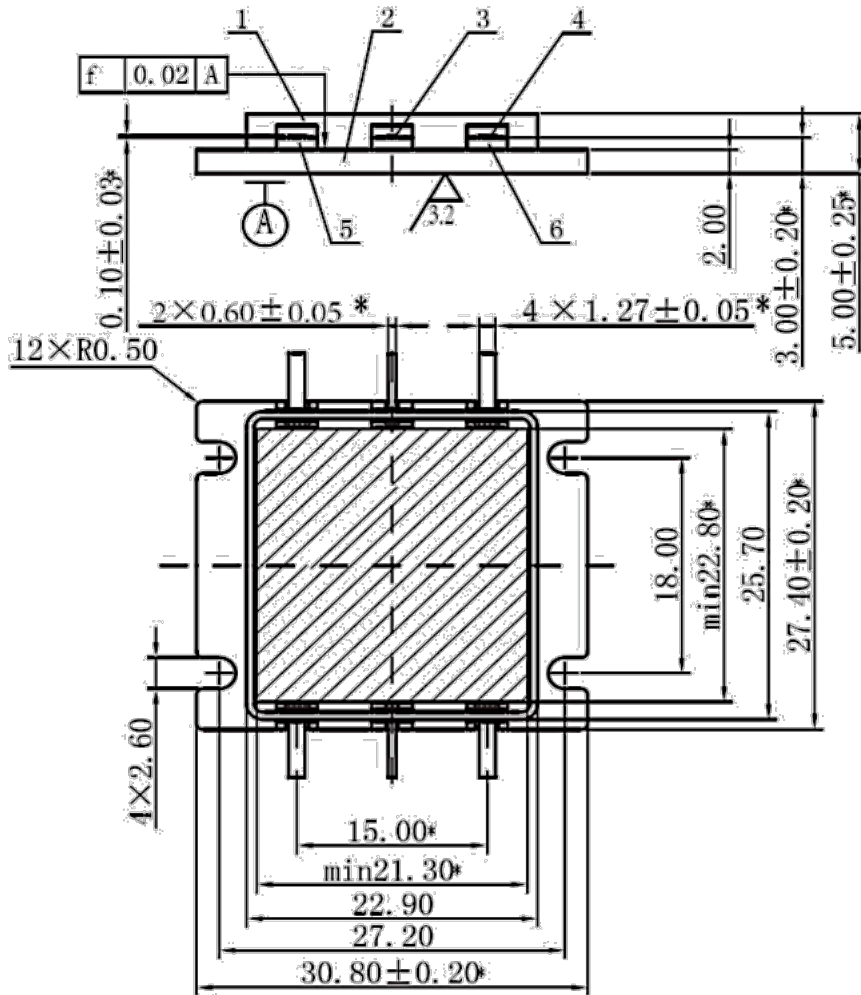

Unit: mm

Attention

- Please keep away from moisture during transportation and storage
- Pay attention to ESD prevention during chip use and assembly. Wear a grounding ESD bracelet.
- When adding electricity, add gate electricity first and then add leakage electricity