

# SANCOM

**SA-PAN034039-P40****3.4-3.9 GHz High Power GaN-HEMT**

## Features


Frequency Range: 3.4-3.9 GHz

$P_{\text{sat}} \geq 40 \text{ dBm}$

Power Gain:  $\geq 11 \text{ dB}$

Efficiency:  $\geq 50\%$

$Z_{\text{in}}/ Z_{\text{out}} = 50 \Omega$

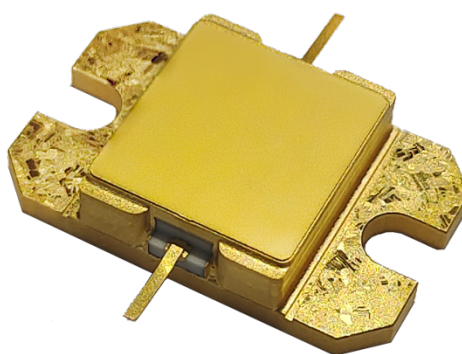

## Description

Sancom Electric's GaN-HEMT SA-PAN034039-P40 offers high power, high efficiency, ease of matching and greater consistency for high power applications with 28V operation. The SA-PAN034039-P40 typically provides 40 dBm of saturated output power and 11dB of large-signal gain and can be widely used in various RF/microwave systems.

### ABSOLUTE MAXIMUM RATINGS


Parameter	Symbol	Condition	Rating	Unit
Drain-Source Voltage	$V_{DS}$	TC=25 °C	40	V
Gate-Source Voltage	$V_{GS}$	TC=25 °C	-5	V
Storage Temperature	$T_{stg}$	TC=25 °C	-65 to 150	°C
Channel Temperature	$T_{ch}$	TC=25 °C	150	°C

### ELECTRICAL SPECIFICATIONS


Parameter	Symbol	Condition	Min	Typ	Max	Unit
Drain-Source Current	$I_{DS}$	$V_{DS}$ : 28 V CW (Continuous Wave) $P_{in}$ : 29 dBm Freq: 3.4 ~ 3.9 GHz	-	0.7	-	A
Saturated Power	$P_{sat}$		40	-	-	dBm
Power Gain	$G_p$		11	-	-	dB
Efficiency	$\eta$		50	-	-	%
Flatness	$\Delta G$		-0.8	-	0.8	dB

## Performance Plots


### Saturated Power VS Frequency

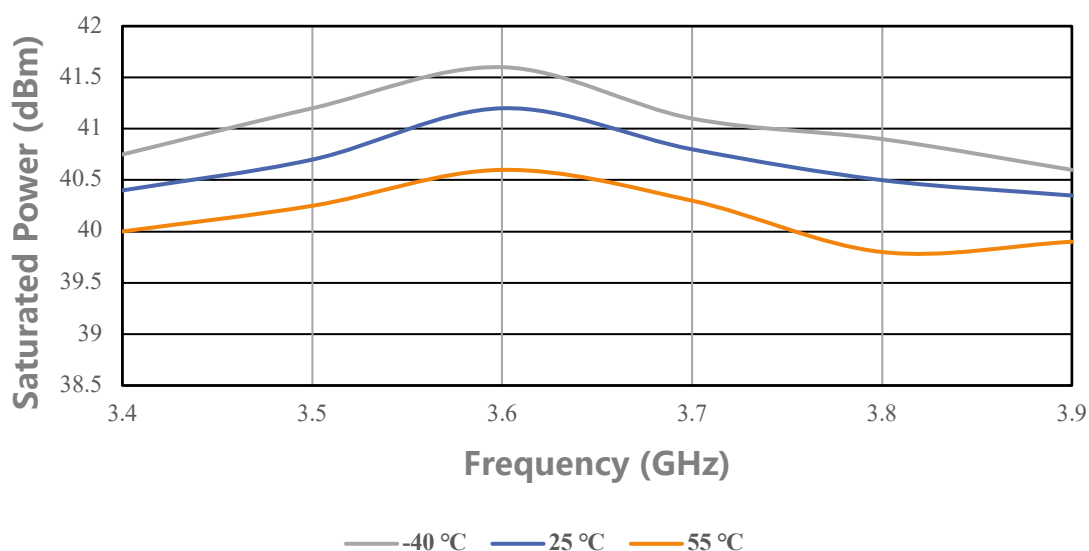


### Efficiency VS Frequency

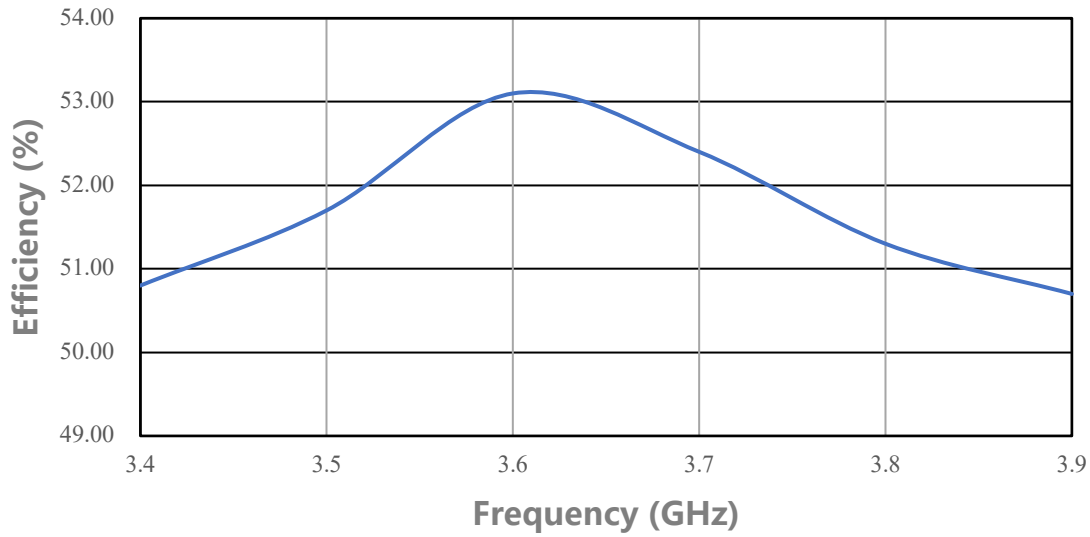

### Power Gain VS Frequency

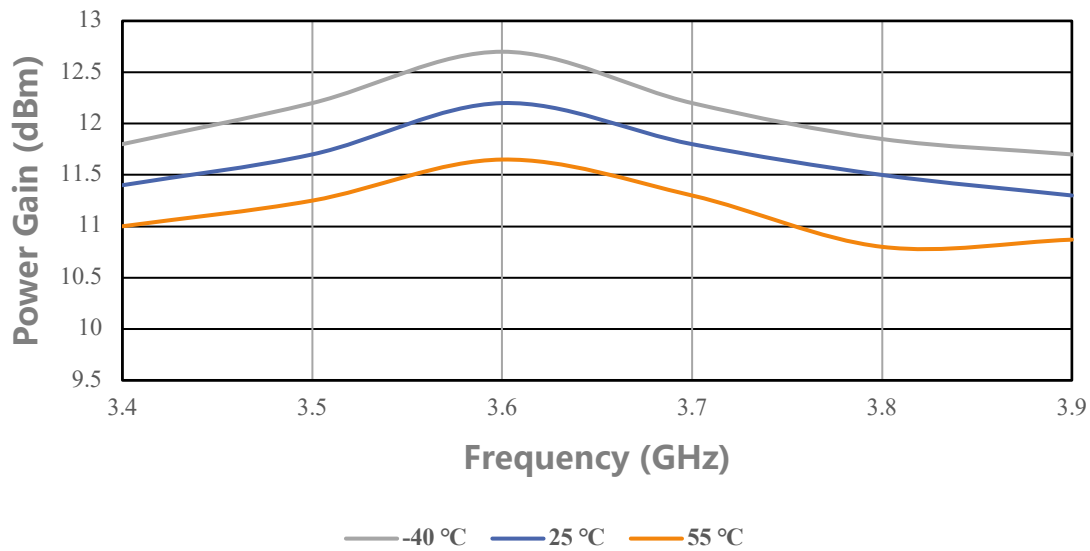

## Simplified Block Diagram

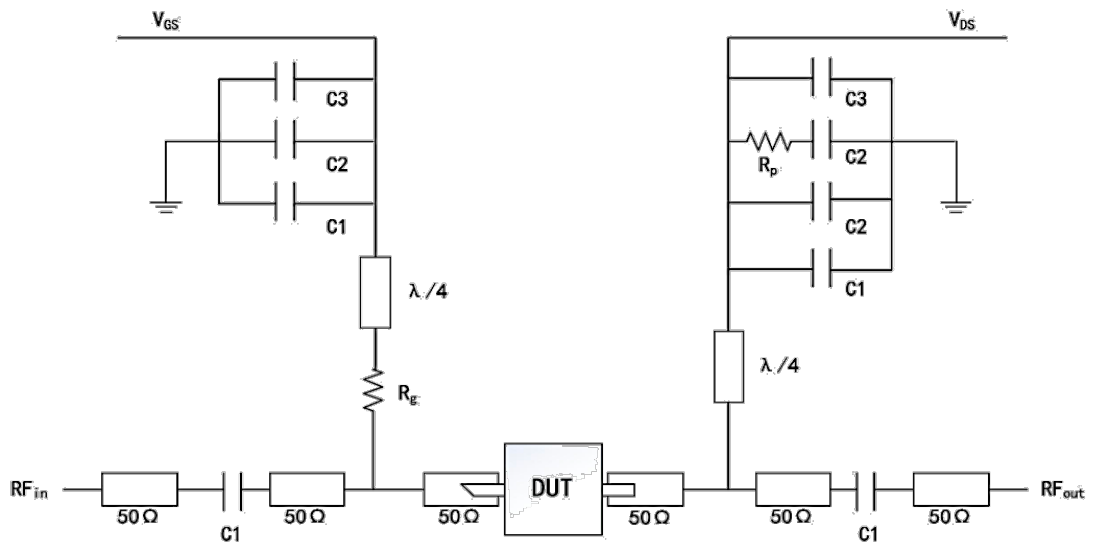

DUT information	
C1: 8 pF	Rp: 51 Ω
C2: 1000 pF	Rg: 15 Ω
C3: 100 μF	

## ESD Protection

ESD	Class III	2000 V
-----	-----------	--------

## Outline Drawing



Unit: mm

## Attention

- Please keep away from moisture during transportation and storage
- Pay attention to ESD prevention during chip use and assembly. Wear a grounding ESD bracelet.
- When adding electricity, add gate electricity first and then add leakage electricity